

For HVAC, Irrigation, OEM, Commercial and Institutional Applications

Butterfly Valves

Series DBF-03 Full Lug and DBF-04 Wafer

Sizes: 2" - 12" (50-300mm) 200 psi (13.8 bars)

Watts Series DBF resilient seated butterfly valves are available in sizes 2" - 12" (50-300mm), wafer or lug body design. This series was designed to meet the stringent requirements for HVAC, Irrigation, OEM, Commercial and Institutional applications, and wherever positive shut-off is required for liquids, gases, and slurries.

Incorporating a 200 psi (13.8 bars) pressure rating for 2" - 12" (50-300mm), the Series DBF is standardly constructed of a cast iron body, ductile iron, aluminum bronze or 316SS disc, and 416SS shaft. Standard seat materials available include Buna-N, EPDM, and Viton. A phenolic-backed seat prevents the seat from collapsing or dislodging and can be replaced in the field. In addition to the above features, the Series DBF mounting pad design can easily accommodate a lever handle, gear operator, and electric or pneumatic actuator.

The Watts Series DBF butterfly valves are designed and manufactured for use with ANSI 125 or 150 Class flanges and to comply with API 609 and MSS-SP-67.

FEATURES

✦ **OPERATORS** - Ten-position handle is standard. An infinite positioning/locking handle is also available on valve sizes 2" - 12" (50-300mm). The infinite position Pos-Lok throttle plate incorporates a memory stop and a padlocking device in the fully closed position. Manual, worm-gear operators are available for all valves and are recommended on 8" (200mm) and larger sizes. Watts butterfly valves are also available with electric or pneumatic actuators and chain wheel operators to satisfy a wide variety of requirements.

✦ **SHAFT** - One-piece shaft delivers positive disc-to-seat location with maximum strength. 416SS is standard with aluminum bronze and ductile iron discs, and 316SS shaft with stainless steel disc.

✦ **SHAFT BUSHINGS** - Duralon® bushings (3) provide shaft support for proper shaft alignment and minimal shaft deflection.

✦ **SHAFT SEAL** - To prevent shaft leakage, the bidirectional shaft seal prevents external contamination of stem area and provides a backup seal to the primary shaft seal formed by the disc/seat interface.

✦ **BODY** - Watts Butterfly Valves are available in Full Lug (DBF-03) and Wafer (DBF-04) types designed for use between ANSI 125 and 150 flanges. Face-to-face dimensions comply with API 609 and MSS-SP-67. All valves are designed to accommodate 2" of insulation. The standard body material is ASTM A-126 Class B cast iron.

✦ **DISC** - Disc edge is machined and polished 360° to assure leak-tight shutoff while minimizing operating torque. Positive, disc-to-shaft connection is provided by stainless steel precision taper pins that are vibration proof.

✦ **SEAT** - Phenolic-backed, non-collapsible, resilient seat is mechanically secured to provide dead-end service to the full 200 psi (13.8 bars) pressure rating. Seat face eliminates the need for flange gaskets. Full 360° sealing isolates the body components from the media and provides the primary shaft seal. Available in EPDM, Buna-N, and Viton. Seat is field replaceable.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



Series DBF-03-M2
Full Lug



Series DBF-04-M2
Wafer

Actuators

The integrally cast, heavy duty four bolt mounting pad, coupled with lower operating torque requirements, provides easy and cost effective automation with a variety of pneumatic and electric actuators.


Duralon is a Registered Trademark of Rexnord Corporation



USA: 815 Chestnut St., No. Andover, MA 01845-6098; www.wattsreg.com
Canada: 5435 North Service Rd., Burlington, ONT. L7L 5H7; www.wattscda.com



DIMENSIONS - WEIGHTS

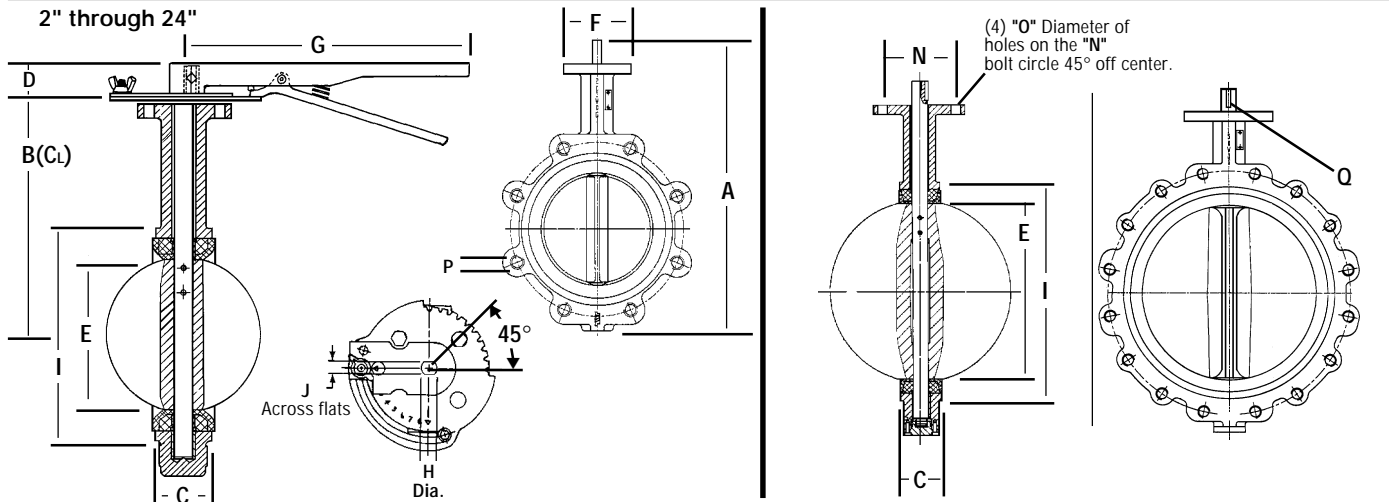

Size	A		B		C		D		E		F		G		H		I		J	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
2"	10 3/4	273	6 5/8	162	1 5/8	41	1 1/4	32	2 1/8	54	3	76	10 1/2	267	1/2	13	4	100	3/8	9
2 1/2"	11 5/8	295	6 7/8	175	1 3/4	44	1 1/4	32	2 9/16	65	3	76	10 1/2	267	1/2	13	4 3/4	121	3/8	9
3"	12 1/8	308	7 1/8	181	1 3/4	44	1 1/4	32	3 1/8	79	3	76	10 1/2	267	1/2	13	5	127	3/8	9
4"	13 3/8	346	7 7/8	200	2	50	1 1/4	32	4 1/8	105	3 3/8	92	10 1/2	267	5/8	16	6 1/8	156	7/16	11.0
5"	14 3/8	372	8 3/8	213	2 1/8	54	1 1/4	32	4 7/8	124	3 3/8	92	10 1/2	267	3/4	19	7 1/2	191	1/2	13.0
6"	15 5/8	397	9	229	2 1/4	57	1 1/4	32	6 1/8	156	3 3/8	92	10 1/2	267	3/4	19	8 3/8	213	1/2	13.0
8"	18 7/8	479	10 1/4	260	2 5/8	60	1 3/4	45	8	200	4 1/2	114	14	356	7/8	22	10 1/2	267	5/8	16.0
10"	21 1/4	540	11 1/2	292	2 5/8	67	1 3/4	45	9 7/8	251	4 1/2	114	14	356	1 1/8	29	12 3/4	324	1 3/16	20.6
12"	24 3/8	626	13 1/4	336	3	76	1 3/4	45	11 7/8	301	5 1/2	140	14	356	1 1/4	32	15 7/8	403	1 1/4	32.0

For 14" - 24" BF ① Series dimensional data, request Engineering Spec Sheet ES-BF-03-M2/BF-04-M2.

Size	Top Plate Drilling				Tapped Lug Data				Key Way		Weight†			
	N		O		Bolt Circle		No. Holes	Bolt P	Q		DBF-03	DBF-04		
	in.	mm	in.	mm	in.	mm			in.	mm	lbs.	kgs.	lbs.	kgs.
2"	2 1/4	57	1/4	6	4 3/4	121	4	5/8"-11UNC x 1 1/4"	-	-	8	3.6	6	2.7
2 1/2"	2 1/4	57	1/4	6	5 1/2	140	4	5/8"-11UNC x 1 3/8"	-	-	10	4.5	7	3.2
3"	2 1/4	57	1/4	6	6	150	4	5/8"-11UNC x 1 3/8"	-	-	10	4.5	7	3.2
4"	2 3/4	70	3/8	10	7 1/2	191	8	5/8"-11UNC x 1 1/2"	-	-	17	7.7	12	5.4
5"	2 3/4	70	3/8	10	8 1/2	216	8	3/4"-10UNC x 1 3/4"	-	-	25	11.3	16	7.3
6"	2 3/4	70	3/8	10	9 1/2	241	8	3/4"-10UNC x 2"	-	-	27	12.2	20	9.1
8"	3 1/2	89	5/8	16	11 3/4	298	8	3/4"-10UNC x 2 1/2"	-	-	40	18.1	29	13.2
10"	3 1/2	89	5/8	16	14 1/4	362	12	7/8"-9UNC x 2 1/4"	-	-	63	28.6	48	21.8
12"	4 1/4	108	5/8	16	17	432	12	7/8"-9UNC x 2 1/4"	1/4 x 1	6 x 25	107	48.5	78	35.4

SEATING TORQUE Buna-N, EPDM, Viton	
Size	Normal Conditions WET/DRY
2"	134/214
2 1/2"	190/289
3"	250/387
4"	390/644
5"	600/959
6"	907/1,542
8"	1,697/2,919
10"	2,500/4,857
12"	3,300/7,071

CV RATING (Full Open)	
Size	CV Rating
2"	135
2 1/2"	220
3"	302
4"	600
5"	1,022
6"	1,579
8"	3,136
10"	5,340
12"	8,250

†Weights are for valves with ductile iron or aluminum bronze discs and 10-position lever handles. Refer to Watts' folder F-CDBF for butterfly valve weights with gear actuators, or consult factory.

How to Order Watts Series DBF

10 - DBF - 03 - 121 - G - M2

Size: _____
2" thru 12"

Series: _____
03; Full Lug, 04; Wafer

Body: _____
1; Cast Iron

Disc: _____
1; Ductile Iron
2; Aluminum Bronze
3; 316 Stainless Steel*

Shaft: _____
1; 416 Stainless Steel
316SS on stainless steel disc models*

Seat: _____
1; EPDM
2; Buna-N
3; Viton

Operator: _____
0; No handle - 2" through 24"
G; Gear Operator - 2" through 24"
5; Standard handle (10-position) - 2" through 12"
P; Positioning / Locking Kit with handle - 2" through 12"

M2 Series: _____

Materials

- Body** - ASTM A-126 Class B cast iron.
- Bushing** - Duralon (3); Teflon® - Dacron liner bonded to fiberglass - epoxy resin outer shell.
- Stem O-rings** - Buna-N
- Disc** - ASTM A-395 Ductile Iron / Electroless Nickel Plated.
ASTM A-148 Aluminum Bronze
ASTM A-351 type 316SS
- Shaft** - 416 Stainless Steel
316 Stainless Steel on 316SS Disc Models
- Seat** - EPDM: -15°F to +275°F (-26°C to +135°C)
Buna-N: -15°F to +180°F (-26°C to +82°C)
Viton: -10°F to +325°F (-23°C to +163°C)

Note: Do not use EPDM when hydrocarbons are present.

Teflon is a Registered Trademark of E.I. DuPont de Nemours, Co., Inc.