



SDS-ST

APPLICATIONS

Specially designed for the following uses:

- Laundry tray
- Wet bar sink
- Air conditioning or dehumidifier condensate
- Residential dishwashers
- Beautician sink

SPECIFICATIONS

Pump:

- Maximum solid size: 1/2"
- Discharge Size: 1 1/2" NPT Thread
- Maximum capacity: 50 GPM
- Maximum Total Head: 26 feet
- Stainless steel fasteners
- Power cord: 10' long with NEMA three prong grounding plug.

Motor:

- HP: .33, Volts: 115, 1Ø
- Hertz: 60
- RPM: 3000
- Maximum amps: 12.0
- Maximum ambient temperature: 104° F (40° C) continuous duty.
- Rated for continuous duty when fully submerged.
- Insulation: Class B
- Overload Protection: On-winding, automatic reset, thermal overloads.

Basin:

- 10 gallon structural foam basin.
- Dimensions: 17" diameter x 13 7/8" high.
- 1 1/2" NPT threaded vent, discharge and inlet connections.
- 1 1/2" schedule 40 PVC discharge pipe (internal).

FEATURES

- Fully assembled at the factory for simplified installation.
- Capable of running dry without damage to components.
- Severe rated oil and water resistant power cable.

ASSEMBLED COMPONENTS

- Pump: ST31AV, 1/3 HP, 1/2" solids handling sump pump with built-in Vertical Master® vertical level switch.

- Structural foam, 10 gallon basin and cover with built-in threaded inlet, vent and discharge connections for simple installation.
- Cord grommet for power cord sealing.

AGENCY LISTINGS




Tested to UL 778 and CSA 22.2 108 Standards By Canadian Standards Association
US File #LR38549

Goulds Pumps is ISO 9001 Registered.

PERFORMANCE RATINGS

Total Head (feet of water)	GPM	GPH
4	50	3,000
10	40	2,340
15	28	1,680
20	15	900

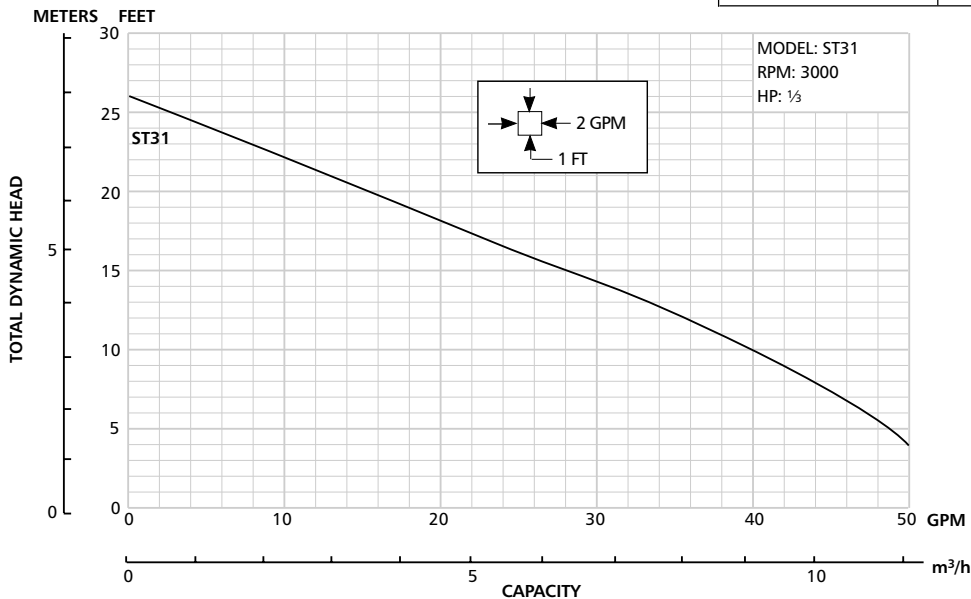

Goulds Pumps, SumpThing and the ITT Engineered Blocks Symbol are registered trademarks and tradenames of ITT Industries.

© 2002 Goulds Pumps
PRINTED IN U.S.A.
BDS-ST

Effective May, 2002
SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.
www.goulds.com

Goulds Pumps

